

Electrolux Benefit Cabinets

600 & 1300 lt digital refrig. & freezers

The models detailed on this sheet are 600 and 1300 liter fan assisted refrigerators and freezers, that offer excellent standards in terms of performance and energy efficiency. The refrigerator models have a temperature range of $-2/+10^{\circ}\text{C}$ and the freezer models have a temperature range of $-15/-22^{\circ}\text{C}$. All models are constructed in AISI 304 stainless steel and have half height solid doors.



- Internal and external structure in AISI 304 stainless steel. External back panel and bottom in galvanized steel as standard on all models.
- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- The digital control features service and HACCP alarms and can be connected to a remote computer.
- Completely automatic defrosting and automatic evaporation of defrost water.

- Adjustable stainless steel feet.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- The temperature range indicated in the specification table is granted at $+43^{\circ}\text{C}$ ambient temperature.
- Excellent forced air cooling system that ensures the utmost uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.

- High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.

Electrolux Benefit Cabinets
600 & 1300 lt digital refrig. & freezers

- Easy to clean reversible door with balloon profile and magnetic gasket.
- The door self-closes when opened at less than 90°. The maximum door opening angle is of 180°.
- The pressed stainless steel recessed door handle without joints makes opening the cabinet extremely easy.


- All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.
- A wide range of optional accessories are available.
- Extremely quiet operation at 51 Db(A) for 600 liter refrigerators.

- HCFC, CFC and HFC free insulation (Cyclopentane), HCFC and CFC free refrigerant gas (R404a).
- All models comply with the standards required by the main international approval bodies and are CE marked.

	RS06RX2H 726689	RS06FX2H 726690	RS13RX4H 727157	RS13FX4H 727158
TECHNICAL DATA				
Operating temperature				
first compartment - min/max °C	-2 / 10	-22 / -15	-2 / 10	-22 / -15
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated
Type of stainless steel				
external	Stainless Steel AISI 304 Scotch Brite	Stainless Steel AISI 304 Scotch Brite	Stainless Steel AISI 304 Scotch Brite	Stainless Steel AISI 304 Scotch Brite
internal	Stainless Steel AISI 304 Scotch Brite	Stainless Steel AISI 304 Scotch Brite	Stainless Steel AISI 304 Scotch Brite	Stainless Steel AISI 304 Scotch Brite
Cooling unit	Built-In	Built-In	Built-In	Built-In
External dimensions - mm				
width	720	720	1440	1440
depth/with open doors	780, 1440	780, 1440	780, 1440	780, 1440
height	2000	2000	2000	2000
Internal dimensions - mm				
width	600	600	1320	1320
depth	665	665	665	665
height	1480	1480	1480	1480
Door hinges	Right Side	Right Side	1 Left+1 Right	1 Left+1 Right
N° and type of grids (included)	4, GN 2/1	3, GN 2/1	8, GN 2/1	8, GN 2/1
N° defrost in 24 hrs.	4/20'	4/30'	4/20'	4/30'
Refrigerant type	R134a	R404a	R134a	R404a
Refrigerant quantity - g.	130	300	310	450
Refrigerant power - W	663	752	791	962
Power - kW				
installed-electric	0.33	0.66	0.445	1.008
Net weight - kg.	126	134	217	247
Supply voltage	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50
INCLUDED ACCESSORIES				
2 S/S SIDE RUNNERS FOR 600-1300L REFRIG.	3	3		
2/1 GN GREY "RILSAN" GRID	3	3		
ACCESSORIES				
2 S/S SIDE RUNNERS FOR 600-1300L REFRIG.	880557	880557		
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539		
2/1 GN GREY "RILSAN" GRID	880720	880720		
ENERGY FREE ALARM DEVICE	881089	881089		
KIT BAKERY FOR 11 PASTRY TRAYS 400X600MM	880124	880124		
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205		
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457		

Electrolux Benefit Cabinets
600 & 1300 lt digital refrig. & freezers

726689, 726690

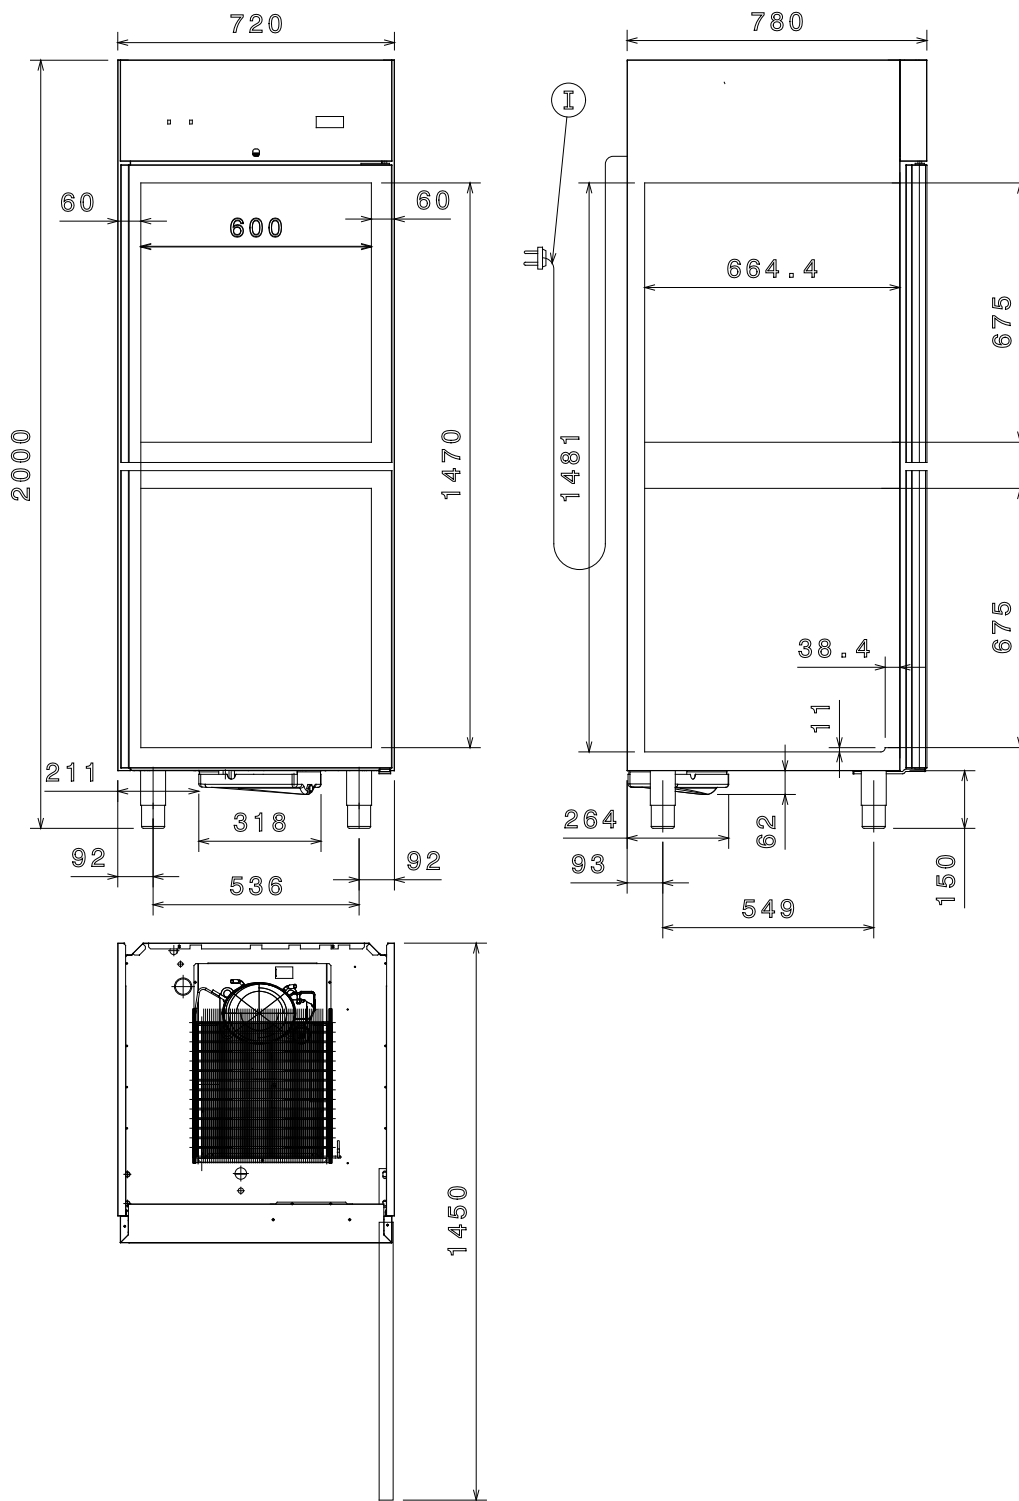


HAEA-1

2008-01-21

LEGEND	RS06RX2H 726689	RS06FX2H 726690
	I - Electrical connection	230 V, 1, 50

Subject to change without notice

Electrolux Benefit Cabinets
600 & 1300 lt digital refrig. & freezers

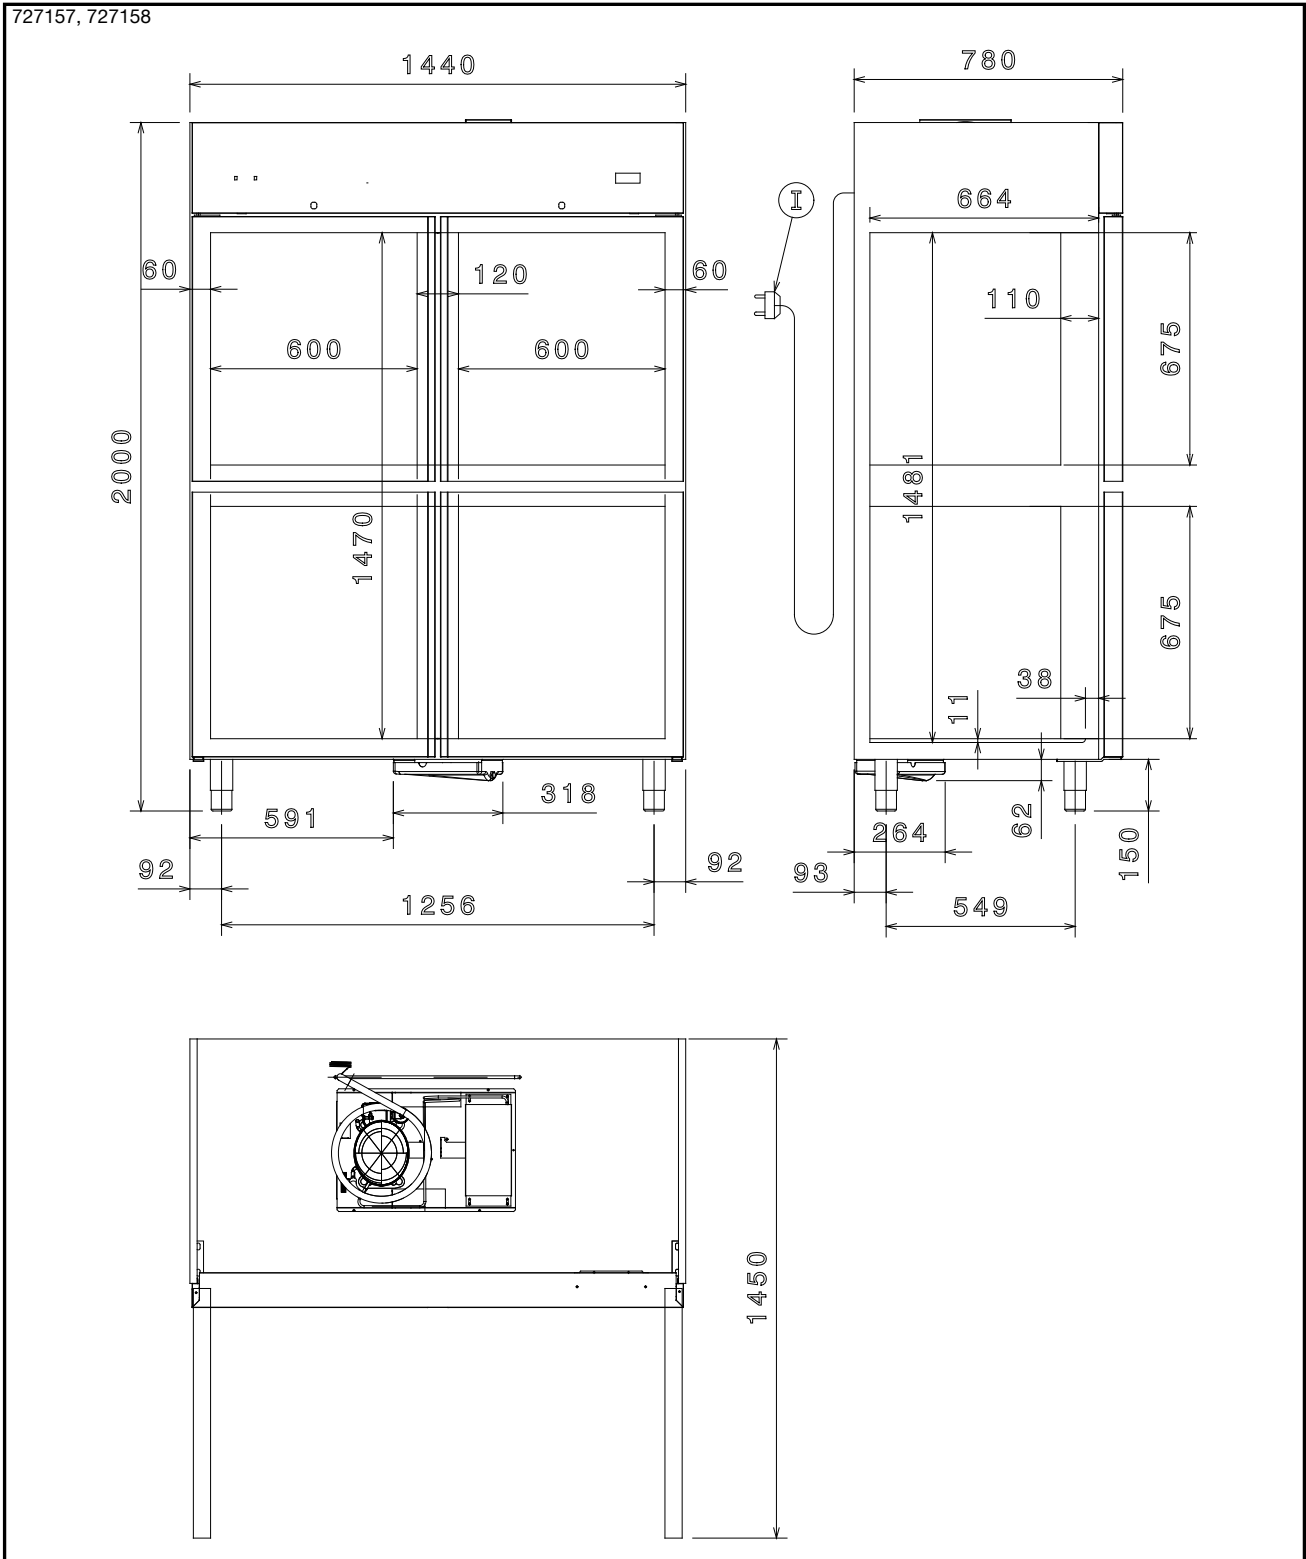

HAEA-1

2008-01-21

Subject to change without notice

LEGEND	RS13RX4H 727157	RS13FX4H 727158
	I - Electrical connection	230 V, 1, 50